

JH-RJ45 series

Socket without exoxy potting compound (插座不灌胶款) 8P8C Cat.6




Figure No.(图号)
JH-RJ45-FAF01-X




Figure No.(图号)
JH-RJ45-FAF02-X

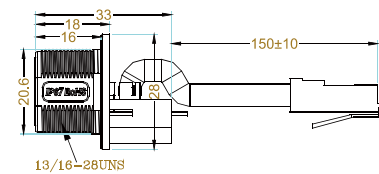


Figure No.(图号)
JH-RJ45-FAM1(2)2-X

Socket with exoxy potting compound (插座灌胶款) 8P8C Cat.6




Figure No.(图号)
JH-RJ45-FBF01-X




Figure No.(图号)
JH-RJ45-FBF02-X



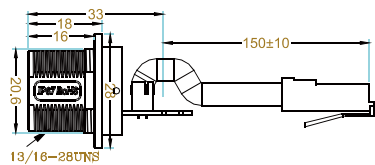


Figure No.(图号)
JH-RJ45-FBM1(2)2-X

Installation method

Panel cutout

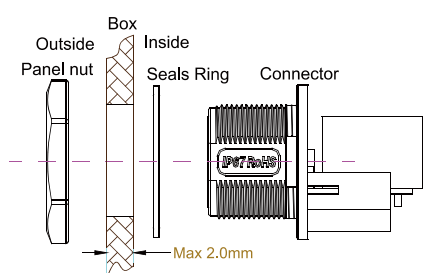

Simple parameter description:
Rated voltage & current: 60-100V DC/AC
Insulation voltage: DC 100V 2mA 60s
Insulation resistance: DC 100V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105°C

简要参数描述:
额定电压及电流: 60-100V DC/AC
绝缘电压: DC 100V 2mA 60s
绝缘电阻: DC 100V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105°C

JH-RJ45 series

JH-RJ45-MSM02


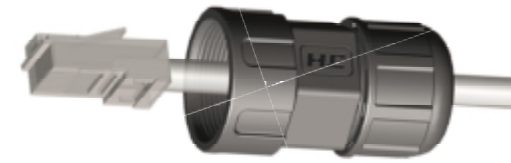


Figure No.(图号)
JH-RJ45-MSM02

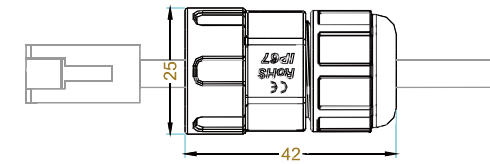


NOTES

1. Operating temperature: -40 to 105°C
2. Protection degree (IP-Code) : IP67
3. RoHS、UL94V-0、Anti-UV (UV-function)
4. Values for cable clamp: 4.5-6.5mm

RJ45 plug and cable required additional procurement
(RJ45插头和线缆需要额外采购, 产品未配)



Figure No.(图号)
JH-RJ45-FSC01

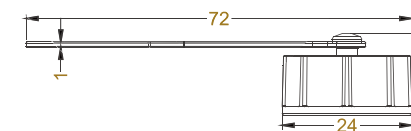

NOTES

1. Operating temperature: -40 to 105°C
2. Protection degree (IP-Code) : IP67
3. RoHS、UL94V-0、Anti-UV (UV-function)
4. Operating cycles: 3000

Installation method

